




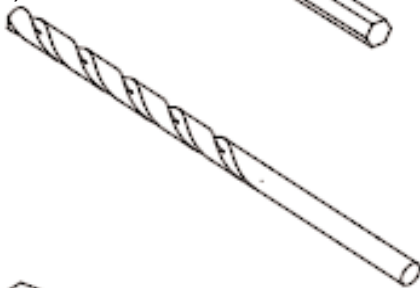

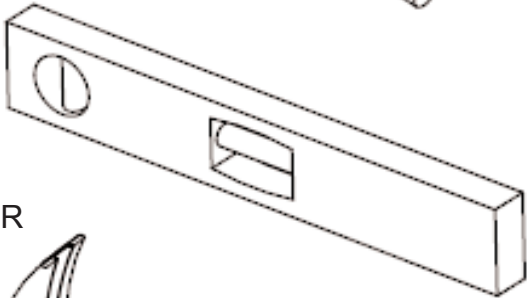

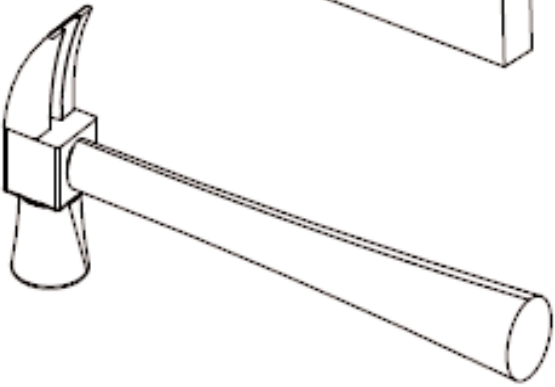

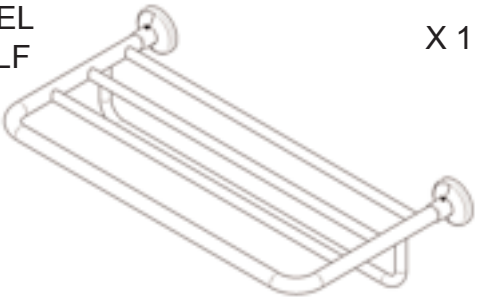


ITEMS INCLUDED			TOOLS REQUIRED	
DRY WALL ANCHOR		X 6	PHILLIPS SCREW DRIVER	
TILE ANCHOR		X 6	PEN / PENCIL	
#10 SCREW		X 6	1/4" (6 mm) DRILL	
MOUNTING BRACKET		X 2	LEVEL SET	
M6 X 6 SET SCREW		X 2	HAMMER	
3 MM HEX KEY		X 1		
HOTEL SHELF		X 1		

INSTALLATION INSTRUCTIONS


564B

HOTEL SHELF


GINGER[®]
Luxury For Your Lifestyle[™]

2001 CARNEGIE AVE, SANTA ANA CA 92705
(949) 417-5207
WWW.GINGERCO.COM

① REMOVE MOUNTING BRACKETS

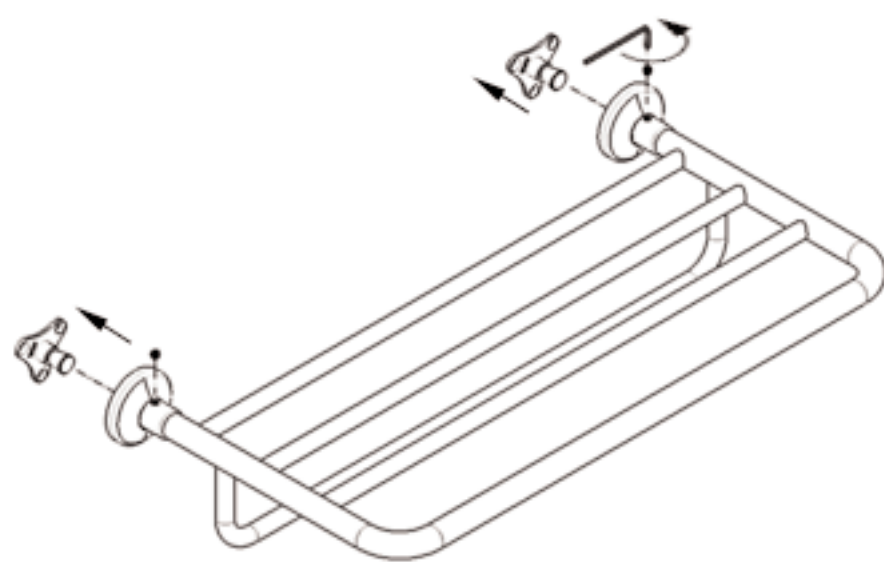


② ALIGN MOUNTING BRACKETS AND MARK LOCATION

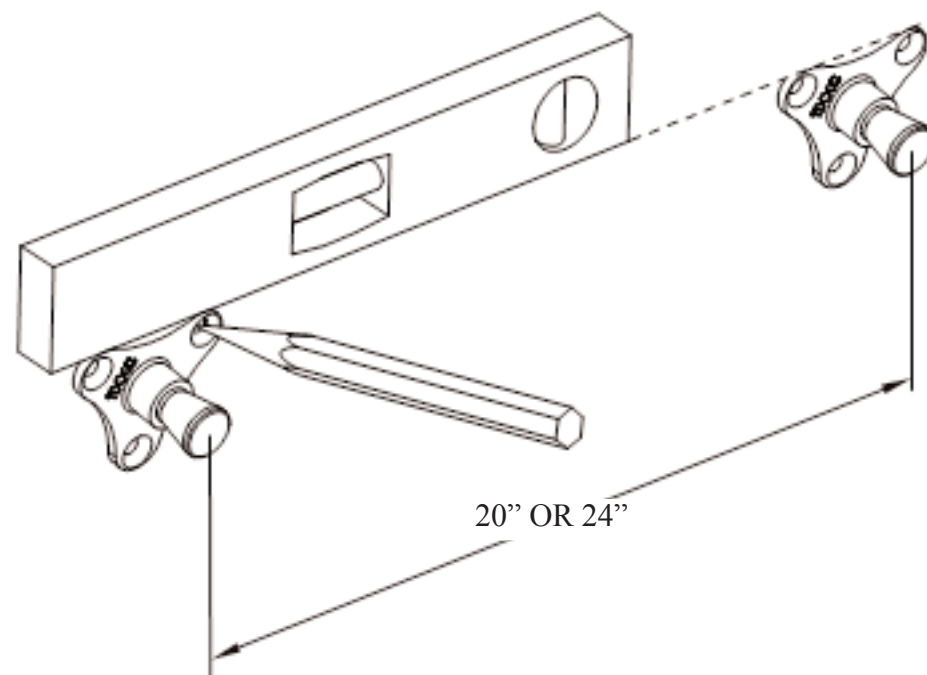


③ DRY WALL INSTALLATION

DO NOT DRILL

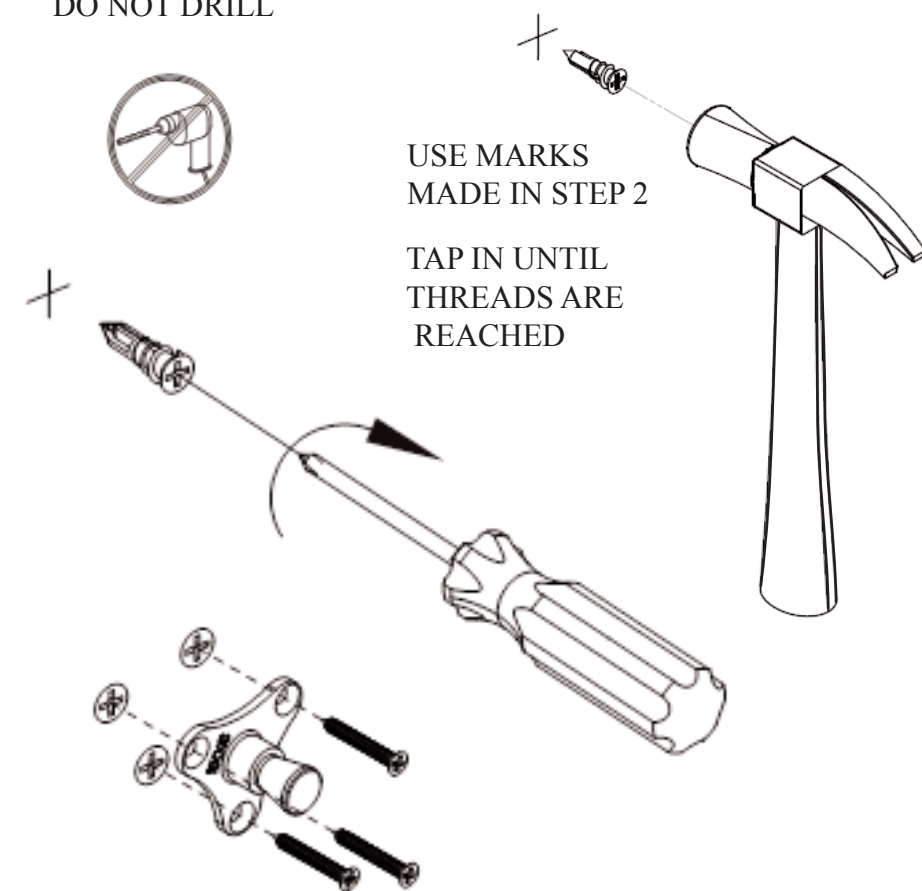

④ TILE OR SOLID WALL INSTALLATION
USE MARKS MADE IN STEP 2

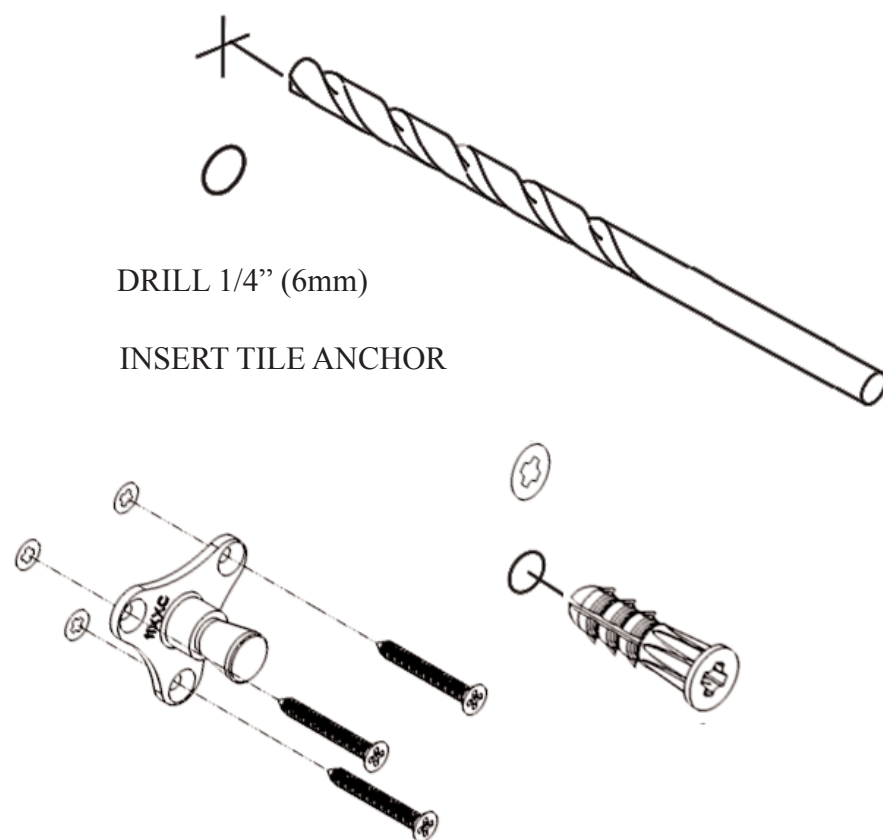

⑤ INSTALL PRODUCT ONTO BRACKETS

