Datey HOLDRITE®* PIPE SUPPORT BRACKET TECHNICAL SPECIFICATION

SPECIFICATIONS

Oatey HoldRite Pipe Support Bracket is designed to position copper water distribution pipe for sinks, lavatories and other fixtures to be soldered to bracket for secure installation after being nailed into wall. HoldRite Pipe Support Bracket has holes on 2" centers for $\frac{1}{2}$ " pipe and 4" centers for $\frac{3}{4}$ " and 1" copper piping.

APPLICATION / USES

- HoldRite Pipe Support Bracket allows pipe to be soldered to bracket for secure installation after being nailed into wall.
- Consult Oatey Technical Department for applications not specifically referenced above.

PHYSICAL PROPERTIES

Material	Copper Plated Steel
Load Rating	25 lbs.

PRECAUTIONS

Read cautions and directions on packaging carefully before using this product. KEEP OUT OF REACH OF CHILDREN.

DIRECTIONS


Nail in place and solder pipe to copper plated bracket for secure installation.

PRODUCT SELECTOR

HOLD	IOLDRITE®* PIPE SUPPORT BRACKET					
\checkmark	Product Number	Description	Pack	Carton Weight		
	33980	Pipe Support Bracket	25	15 lbs.		

*HoldRite is a registered trademark of Reliance Worldwide Corporation.

Job Name Location		Item #
Engineer	_ Contractor	
P0 #	Tag	
Representative		

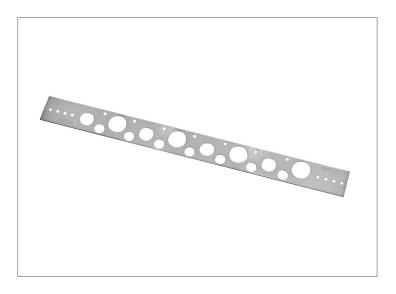

Access BIM/Revit content through www.oatey.com