

MEDIUM WALL LANTERN

 Wall mounted • Wet location listed **PROGRESS LED**


P560056-020-30

Description:

A modern outdoor LED sconce with an architectural-inspired open linear frame and clear glass diffuser. Finished in Antique Bronze.

Specifications:

- Antique Bronze (-020) (painted)
- Aluminum Construction
- Clear/ Clear Seeded glass diffuser
- A modern outdoor LED sconce.
- LED source provides energy efficient source with low maintenance and cost savings benefits
- Features an architectural-inspired open linear frame and clear glass diffuser
- 624 lumens 66 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	624/66 (LM-82)
Lumens/LPW (Delivered)	309/32.9 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30° C
Warranty	5 year warranty
Labels	cCSAus Wet location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

Width: 5-1/8"
Depth: 5-3/4"
Height: 20"
H/CTR: 2-1/4"

Glass
Width: 3-1/8"
Height: 16-5/16"

Photometrics:


P560056-020-30

ELECTRICAL DATA	P560056-020-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Input Power	9
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30° C
Dimming	Yes*

*See Dimming Notes for more information

P560056-020-30

LED Light Engine: 3000 K 90+
System Wattage: 9
Fixture delivered lumens: 309
Fixture Efficacy: 32.9
Spacing Criteria:

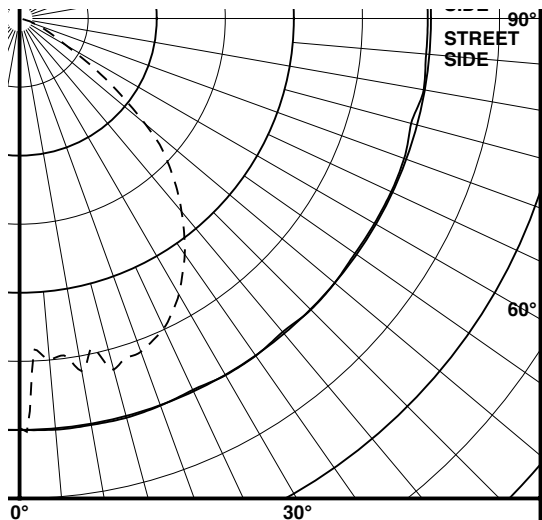

ZONAL LUMEN	SUMMARY
0-5	3
5-10	9
10-15	14
15-20	20
20-25	24
25-30	28
30-35	30
35-40	30
40-45	28
45-50	25
50-55	19
55-60	11
60-65	6
65-70	3
70-75	2
75-80	1
80-85	0
85-90	0

Test 16.03583 Test Date 01/04/17

P560056-020-30

Dimming Notes:

P560056 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Leviton SureSlide 6672

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.