TAYLOR 67" FREESTANDING RECTANGULAR TUB

Cat. No. ATCRECN67FIG-XX





L: 66-1/4" W: 29" H: 23"

Water depth: 17-3/4" to top of tub Water depth: 14-1/2" to overflow Center of drain to back of rim: 9-1/2" Overflow hole diameter: 3" x 1/2" Bottom of drain to floor: 5-1/4" Bottom of tub wall to floor: 6-1/2"

The following is recommended for ATCRECN67FIG:


Faucet: part #7022, 7082, or 7088
Rigid, freestanding supplies: part #4502
Freestanding filler: part #7902 or 7934
(Supplies included with filler)



For easier installation we recommend use of 5598-ITD Easy Install Rough In Kit

Gallon Capacity: 58
Shipping Weight: 164 lbs.
Empty Weight: 108 lbs.
Filled Weight: 592 lbs.





(Air jet configuration if system is added, more info on page 2.)

Features:

- ► Acrylic construction for lighter weight
- ► Sleek design compliments many decors
- ▶ Drain and overflow covers included (available in 7 finishes)
- ► Rim measurement 1-1/2"
- ► Overflow slot with integrated drain
- ▶ Drain included
- ► Angle slope of tub 30°
- ► No faucet holes
- ► Includes built-in adjusters
- ► Tub is thoroughly inspected before shipment
- ▶ Option to add foam insulation between tub walls available
- ▶ New: Air jet sytem now available, more info on page 2


Finishes:

CP Polished ChromeBN Brushed NickelORB Oil RubbedBronze

WT White

PB Polished Brass PN Polished Nickel MB Matte Black

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color

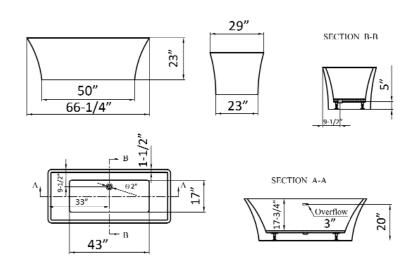

BATHTUB AIR JET KIT

Cat. No. AIR KIT 1, AIR KIT 2





- A AIR JET Bottom air jets for maximum bubble action.
- B BLOWER -The heart of the massage system.
- C MANIFOLD Double back flow security prevention device.
- D FLEXIBLE PVC HOSING IAPMO certified.
- E MAIN AIR INTAKE HOSE High temperature and pressure resistant.

Air Kit is installed in tub before shipment

Features:

- ▶ 750 Watt blower motor operates system
- ▶ 300 Watt air heater warms air
- ► System powered by 120V
- ▶ 16 brass air jets placed in bottom of tub
- ► Each air jet has 24 holes
- ► Air jet caps available in white (AIR KIT 1) or black (AIR KIT 2)
- ► Includes 1¼" x 3' main air hose plus 1¼" x 9' extension hose
- ► Automatic system purge after each use
- ► Automatic safety timer turns off system after 20 minutes
- ► Includes water tight remote control
- ► Compatible with most acrylic, copper and resin tubs with no feet

Rectangular bathtub

► Not available with cast iron tubs or tubs with feet

INSIDE TUB VIEW - WILL VARY BY TUB DESIGN





Remote

