

Undertone® Lyric™ top-/under-mount bar sink K-3341

Features

- 24-inch minimum base cabinet width.
- Single bowl.
- 7-1/2-inch depth.
- No faucet holes.
- SilentShield® sound-absorption technology offers quieter performance.
- Includes installation hardware.



18-gauge stainless steel.

Installation

Under-mount

Recommended Products/Accessories

K-6377 Sponge Caddy

K-6378 Kitchen Brush Caddy

K-8801 Sink Strainer

K-8799 Sink Strainer

K-6379 Kitchen Squeegee

Optional Products/Accessories

K-6518 Rinse Basket

K-8813 Manual Sink Strainer with Tailpiece

Included Components

Product consists of:

52047 Clamp Accessory Pack, 4 Ea.



ADA

Codes/Standards

ASME A112.19.3/CSA B45.4 ADA ICC/ANSI A117.1

Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks


See website for detailed warranty information.





Undertone® Lyric™

top-/under-mount bar sink **K-3341**

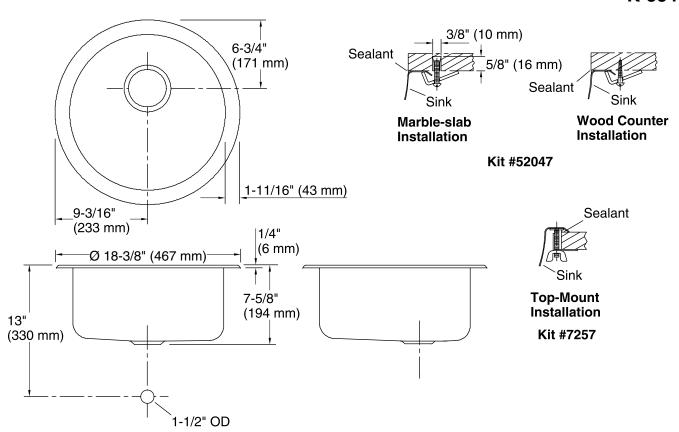

Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Under-mount Min. base cabinet 24" (610 mm)

width:

Bowl area (Only): Diameter: 15" (381 mm)

Bowl depth: 7-1/2" (191 mm)

Drain hole: 3-5/8" (92 mm)

Template: 113392-7, required, included

Notes

Install this product according to the installation instructions.

Supplied bowl clamp assemblies require 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops. For multiple bowl under-mount installations, a

minimum distance of 3-1/2" (89 mm) is required

between bowls.

Countertop supplier to determine required support.

Waterproof unprotected overhang area of the underside of wood counter.

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.

